


FLAT HINGES

ADJUSTABLE TORQUE HINGE

2399

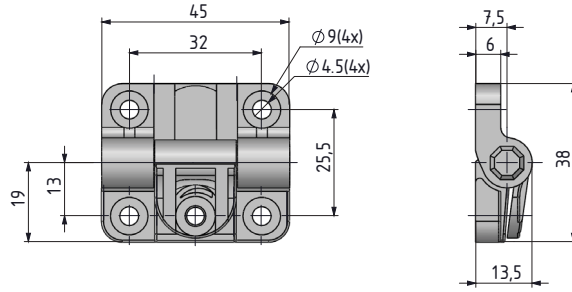

- Hinge torque can be adjusted with screw
- Provide position control
- Suitable for left- and right-hand applications
- Fixed with M4 screw


MATERIAL

BODY: Delrin
 SCREWS AND NUTS: Stainless Steel (AISI 304)


PERFORMANCE DETAILS

Axial load: (N)
 Working load: 700
 Breaking load weight: 1100
Radial load: (N)
 Working load: 1400
 Breaking load weight: 1800
Torque value: 0.8 N.m.
Working temperature:
 - 5°C + 65°C


Fasteners:
 (Bolts and nuts are not supplied)
 Screw and nut: M4

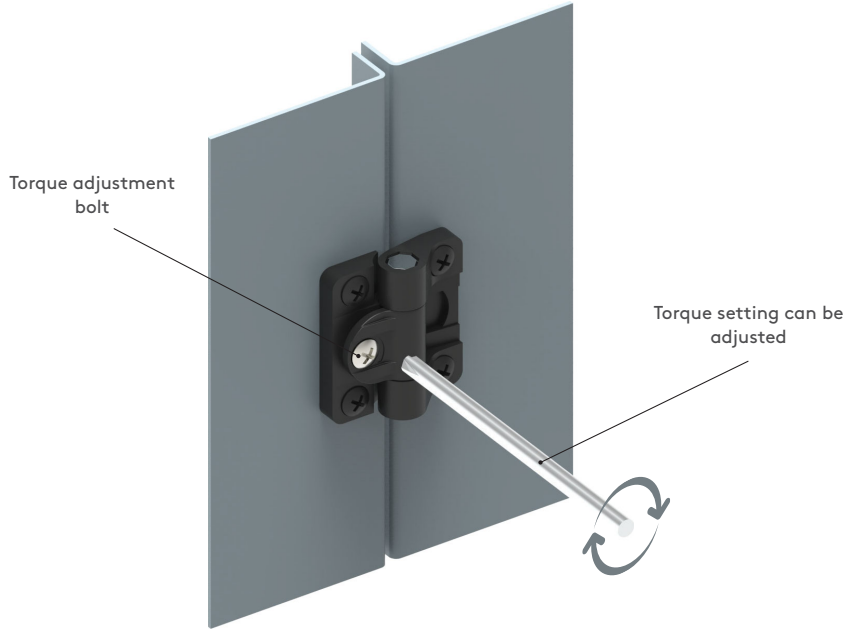

Axial load (N)



Radial load (N)



Hinge Rotation Angle



⚠ Note: Bolts are not supplied

MATERIAL	M	FINISH	F
Plastic	2	No finish	0

Group Code	Material	Finish
2399	2	0